


# Actuator

704.200.4

Distribution by  
Farnell

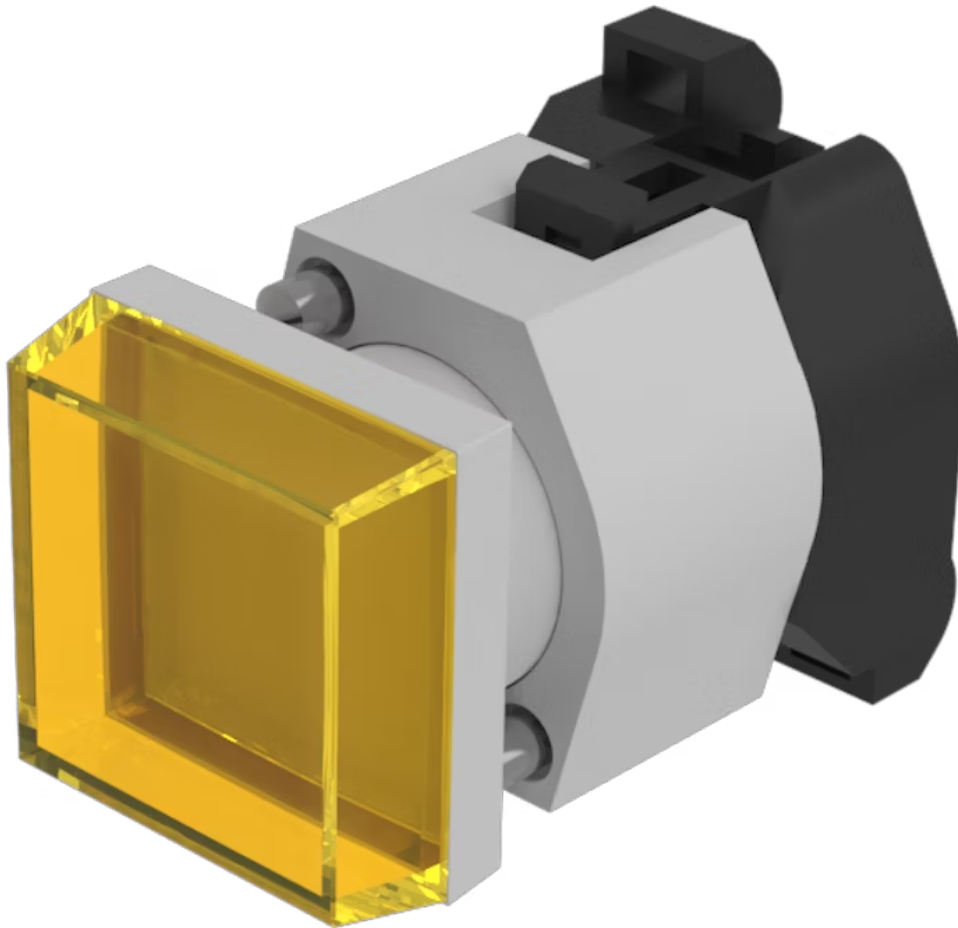

<https://farnell.eao.com/p/704.200.4>

Your product:

---



## 704.200.4 Actuator

### FRONT

|                       |               |
|-----------------------|---------------|
| Front dimension:      | 30 mm x 30 mm |
| Front form:           | Square        |
| Front bezel colour:   | Grey          |
| Front bezel material: | Plastic       |

### MOUNTING

|                |                |
|----------------|----------------|
| Design:        | Raised         |
| Mounting type: | Panel mounting |

### OPERATING-/INDICATION PART

|                          |             |
|--------------------------|-------------|
| Lens cap colour:         | Yellow      |
| Lens cap material:       | Plastic     |
| Lens cap optical effect: | transparent |
| Marking cap colour:      | White       |
| Marking cap optics:      | translucent |

### ELECTRICAL CHARACTERISTICS

|            |                                                                                           |
|------------|-------------------------------------------------------------------------------------------|
| Standards: | The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1 |
|------------|-------------------------------------------------------------------------------------------|

### MECHANICAL CHARACTERISTICS

**Terminal:** Screw terminal

**Weight:** 0.05 kg

### AMBIENT CONDITION

**IP Protection:** IP65 front side

**Operating temperature:** – 40 °C ... + 55 °C

**Storage temperature:** – 40 °C ... + 85 °C

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant


### OTHER

**Short Description:** Actuator, 30 mm x 30 mm, Square, Grey, Plastic, Screw terminal


**Housing colour:** Grey

**Housing material:** Plastic


**Wiring diagrams:**

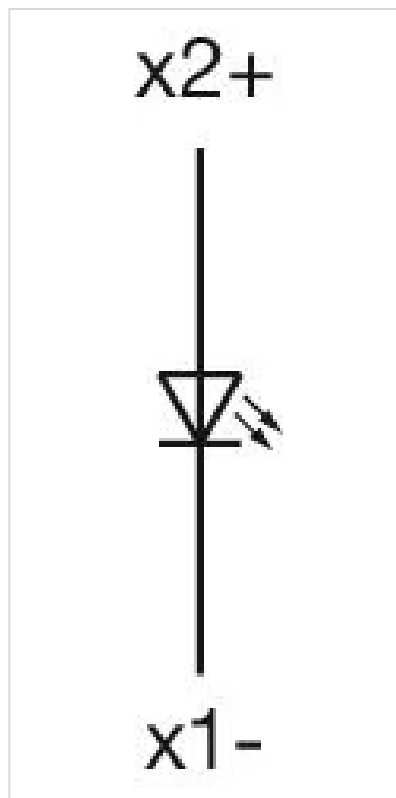



**Mounting cut-outs:**

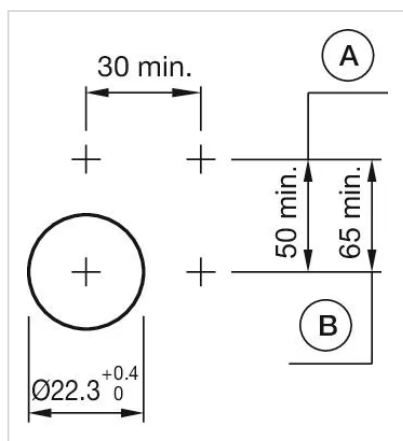

A = Screw terminal  
B = Push-in terminal (PIT)

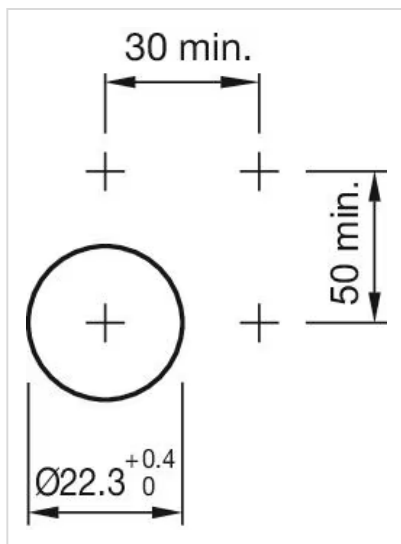

#### Dimension drawings:

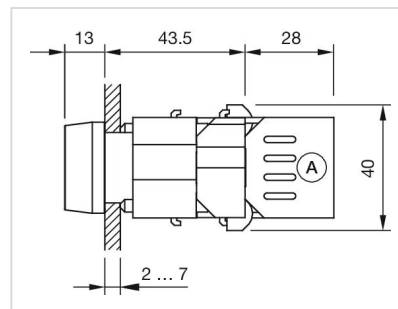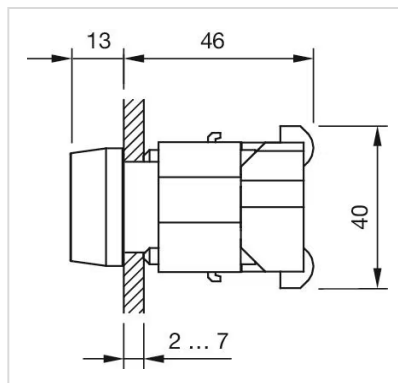

A = Screw terminal