

# Single-LED

10-2412.1089P

Distribution by  
Farnell



<https://farnell.eao.com/component/10-2412.108...>

Your product:

---



## 10-2412.1089P Single-LED

*Loading . . .*

### OPERATING-/INDICATION PART

**Illumination colour:** White

### ELECTRICAL CHARACTERISTICS

**Operating voltage:** 24 V AC/DC -30% / +25%

**Operation current:** 7,5 mA -30%/+25%

**Lumi. Intensity:** 700 mcd

### MECHANICAL CHARACTERISTICS

**Weight:** 0.001 kg

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

### OTHER


**Short Description:** Single-LED, BA9s, White, 24 V AC/DC -30% / +25%

**Kind of illumination:** Multi-LED EN 50155

### Hints:

A suitable LED remover Part No. 700.006.0  
The luminous intensity stated is for when used with DC  
Electrical and optical data are measured at 25 °C  
The specified 24 VAC/VDC versions are built with a protection diode  
Specified 24 VAC/VDC versions are built with a bridge rectifier  
The new, white BA9s LED operates within a range of 16VDC to 34VDC. It conforms to the norms EN 50155 and IEEE 1476  
Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

**Wiring diagrams:**

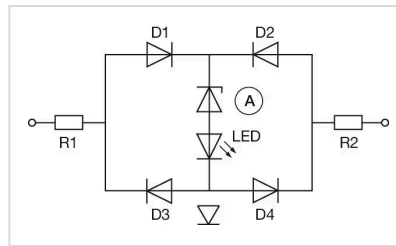

**Dimension drawings:**

