

# Actuator

14-  
060.207

Distribution by  
Farnell



<https://farnell.eao.com/component/14-060.207/...>

Your product:

---



## 14-060.207 Actuator

*Loading ...*

### FRONT

**Front form:** Round

### MOUNTING

**Design:** Raised

**Mounting cut-out:** Ø 22.3 mm

**Mounting type:** Panel mounting

### OPERATING-/INDICATION PART

**Lens cap material:** Plastic

**Lens cap optical effect:** transparent

**Illumination colour:** Red

### ELECTRICAL CHARACTERISTICS

**Operating voltage:** 24 V AC/DC

**Operation current:** 50 mA

**Electrical lifetime:** 50 000 h

### MECHANICAL CHARACTERISTICS

**Terminal:** Push-in terminal

**Tightening torque:** Fixing nut min. 0.8 Nm

**Wire cross section:**  
wire 0.2 ... 1.0 mm<sup>2</sup>  
wire 0.2 ... 0.75 mm<sup>2</sup> with core and sleeve  
wire 0.2 ... 1.0 mm<sup>2</sup> without core and sleeve

**Weight:** 0.014 kg

### **AMBIENT CONDITION**

**IP Protection:** IP20 rear side, IP65, IP67, IP69K front side, according to EN IEC 60529

**Operating temperature:** – 25 °C ... + 60 °C

**Storage temperature:** – 40 °C ... + 85 °C

**Shock resistance:** Max. 300 m / s<sup>2</sup>, pulse width 18 ms (sinusoidal EN IEC 60068-2-27)

**Vibration resistance:** Max. 100 m / s<sup>2</sup> from 10 Hz ... 500 Hz, (sinusoidal EN IEC 60068-2-6)

**Climate resistance:** Damp heat, steady: 56 days, + 40 °C/93 % relative humidity, according to EN IEC 60068-2-78  
Rapid change of temperature: 5 cycles, – 40 °C ... + 85 °C, as per EN IEC 60068-2-14

### **CERTIFICATE**

**Approbations:** UL

**Conformities:** CE, UKCA

**REACH:** REACH compliant

**RoHS:** RoHS compliant

### **OTHER**


**Short Description:** Actuator, Ø 22.3 mm, Round, Push-in terminal, Red

**Kind of illumination:** Single-LED


**Housing colour:** Black

**Housing material:** Plastic

**Wiring diagrams:**

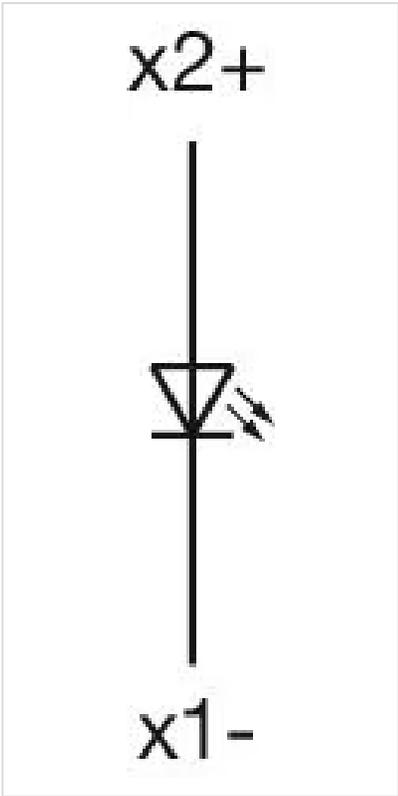

Mounting cut-outs:

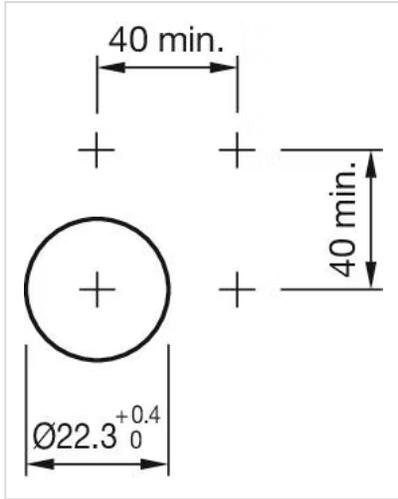

Dimension drawings:

