

Indicator

17-350230











17-350230 Indicator

Front dimension: Ø 16 mm

Reflector: Metal, polished chromium-plated

Round

MOUNTING

Front form:

Design: Raised

Mounting cut-out: Ø 14 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens: round

Illumination colour: Red

ELECTRICAL CHARACTERISTICS

Operating voltage: 230 V AC

Operation current: 3 mA ± 15 %

Lumi. Intensity: 18 mcd

Polarity: Anode (+) Brass plug-in connector


Cathode (-) Brass tinned plug-in connector

MECHANICAL CHARACTERISTICS


Terminal: Plug-in terminal, 2.8 x 0.8 mm

Tightening torque: Fixing nut max. 0.2 Nm


| Weight: | 0.015 kg | |
|------------------------|--|--|
| | | |
| AMBIENT CONDITION | | |
| IP Protection: | IP40 front side, IP65 front side, according to IEC 60529 | |
| Operating temperature: | – 20 °C + 60 °C | |
| Storage temperature: | – 25 °C + 80 °C | |
| | | |
| CERTIFICATE | | |
| Approbations: | UL | |
| Conformities: | 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC) | |
| REACH: | REACH compliant | |
| RoHS: | RoHS compliant | |
| | | |
| OTHER | | |
| Short Description: | Indicator, Ø 14 mm, Ø 16 mm, Round, Plug-in terminal, 2.8 x 0.8 mm, Red | |
| Kind of illlumination: | Single-LED | |
| Product attributes: | With terminals protection tube | |
| Hints: | Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-) IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket. The plastic is limited resistant to chemicals. | |
| Wiring diagrams: | | |

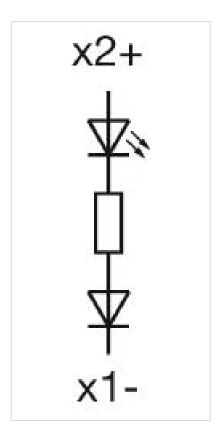

Mounting cut-outs:

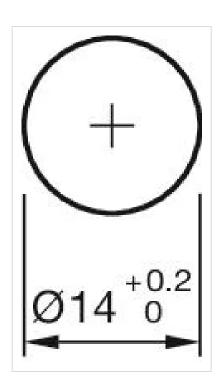

Dimension drawings:



A = Protection tube (only 230 VAC) B = Tri-colour