

# Indicator

17-411231Z











## 17-411231Z Indicator

Е	D	0	N	٦
г	п	v	14	

Front dimension:  $\emptyset$  18,3 mm

Front form: Round

Reflector: Plastic, Black

#### **MOUNTING**

Design: Raised

**Mounting cut-out:** Ø 16.2 mm

Mounting type: Panel mounting

#### **OPERATING-/INDICATION PART**

Lens: flush

Illumination colour: Green

#### **ELECTRICAL CHARACTERISTICS**

Operating voltage: 230 V AC  $\pm 10 \%$ 

**Operation current:** 3 mA  $\pm 15$  %

Lumi. Intensity: 120 mcd

Polarity: Anode (+) Brass plug-in connector


Cathode (-) Brass tinned plug-in connector

#### **MECHANICAL CHARACTERISTICS**


**Terminal:** Plug-in terminal, 2.8 x 0.8 mm

**Tightening torque:** Fixing nut max. 0.2 Nm


Weight:	0.008 kg	
AMBIENT CONDITION		
IP Protection:	IP40 front side, IP65 front side, according to IEC 60529	
Operating temperature:	– 20 °C + 60 °C	
Storage temperature:	– 25 °C + 80 °C	
CERTIFICATE		
Approbations:	UL	
Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)	
REACH:	REACH compliant	
RoHS:	RoHS compliant	
OTHER		
Short Description:	Indicator, Ø 16.2 mm, Ø 18,3 mm, Round, Plug-in terminal, 2.8 x 0.8 mm, Green	
Kind of illlumination:	Single-LED	
Product attributes:	With terminals protection tube	
Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-) IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket. The plastic is limited resistant to chemicals.	
Wiring diagrams:		

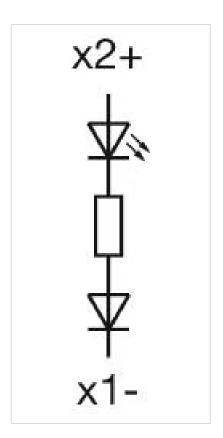

### Mounting cut-outs:



#### Dimension drawings:



A = Protection tube (only 230 VAC) B = 1 gasket C = flat

conical

D = round