

Actuator

45-
2234.11K0.000

Distribution by
Farnell



<https://farnell.eao.com/component/45-2234.11K...>

Your product:



45-2234.11K0.000 Actuator

Loading ...

FRONT

| | |
|------------------------------|-----------|
| Front dimension: | Ø 29,5 mm |
| Front form: | Round |
| Front bezel colour: | Black |
| Front bezel material: | Plastic |

MOUNTING

| | |
|--------------------------|----------------|
| Design: | Raised |
| Mounting cut-out: | Ø 22.3 mm |
| Mounting type: | Panel mounting |

OPERATING-/INDICATION PART

| | |
|-----------------------------|------------------------|
| Lens colour: | Colourless |
| Lens material: | Plastic |
| Lens illumination: | Illuminated |
| Lens shape: | Flush |
| Lens optics: | transparent |
| Lens type: | Level with front bezel |
| Illumination colour: | Colourless |

MECHANICAL CHARACTERISTICS

| | |
|--------------------------|-----------------------------|
| Switching action: | Maintained |
| Switching system: | Slow-make switching element |

Mechanical lifetime: 500 000 cycles of operation
Operating frequency: Max. 1 800/h
Weight: 0.017 kg

AMBIENT CONDITION

IP front protection: IP66, IP67, IP69K
Operating temperature: – 25 °C ... + 70 °C
Storage temperature: – 40 °C ... + 80 °C
Shock resistance: According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
Vibration resistance: According to IEC 60068-2-6: 20 ... 500 Hz: 5 g
Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE


REACH: REACH compliant
RoHS: RoHS compliant

OTHER

Short Description: Actuator, Ø 22.3 mm, Ø 29,5 mm, Flush, Illuminated, Colourless, Plastic, transparent, Round, Black, Plastic, Maintained, IP66, IP67, IP69K, Colourless
Housing colour: Black
Housing material: Plastic
Product attributes: Push to unlatch
Hints: Push to unlatch
Wiring diagrams:



Mounting cut-outs:

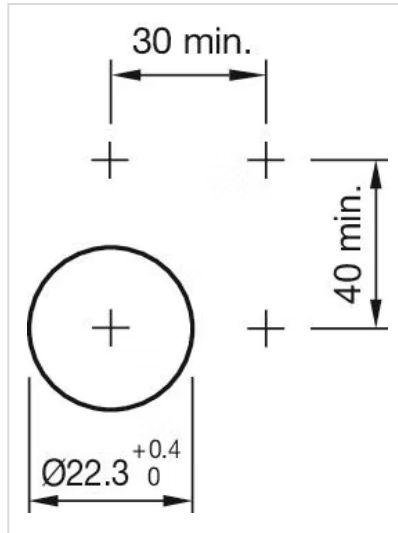

Dimension drawings:

