


# Actuator

45-2828.4D20.001





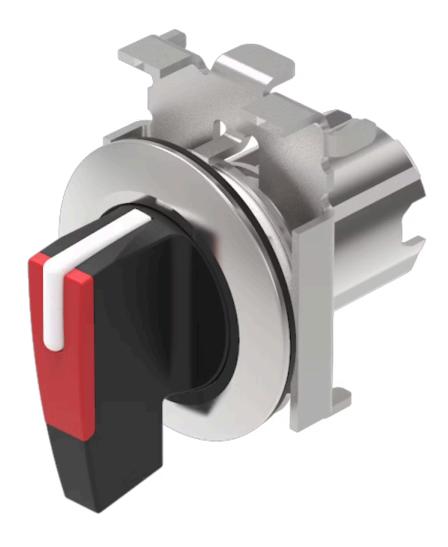





## 45-2828.4D20.001 Actuator

## **FRONT**

Front dimension: Ø 38 mm

Front form: Round

Front bezel colour: Sand grey

Front bezel material: Metal

#### **MOUNTING**

Design: Flush

Mounting cut-out: Ø 30.5 mm

Mounting type: Panel mounting

### **OPERATING-/INDICATION PART**

Lever colour: Red

Lever material: plastic

Lever shape: long

### **MECHANICAL CHARACTERISTICS**

Switching action: Rest - Maintained

**Switching positions:** 2 positions

**Switching angle:**  $90^{\circ}$  right  $/ -45^{\circ}$  ...  $+45^{\circ}$ 

**Mechanical lifetime:** 1 Mil. cycles of operation

Operating frequency: 1 800/h

**Weight:** 0.085 kg

#### **AMBIENT CONDITION**

IP front protection: IP66, IP67, IP69K

**Operating temperature:**  $-25 \, ^{\circ}\text{C} \, ... + 70 \, ^{\circ}\text{C}$ 

Storage temperature:  $-40 \, ^{\circ}\text{C} \dots + 80 \, ^{\circ}\text{C}$ 

**Shock resistance:** According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

**Vibration resistance:** According to IEC 60068-2-6: 10 ... 500 Hz: 5 g

Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

#### **CERTIFICATE**

**REACH:** REACH compliant

RoHS: RoHS compliant

#### **OTHER**


**Short Description:** Actuator, Ø 30.5 mm, Ø 38 mm, optional illuminative, Red, long, Round, Sand

grey, Metal, Rest - Maintained, IP66, IP67, IP69K


Housing material: Metal

**Hints:** Front panel thickness 1 ... 6 mm

Switching positions:



Wiring diagrams:



## Dimension drawings:

