

Actuator

45-
2D36.2A20.000

Distribution by
Farnell



<https://farnell.eao.com/p/45-2D36.2A20.000>

Your product:



45-2D36.2A20.000 Actuator

FRONT

Front dimension:	Ø 60 mm
Front form:	Round
Front bezel colour:	Silver
Front bezel material:	Metal

MOUNTING

Mounting type:	Panel mounting
-----------------------	----------------

OPERATING-/INDICATION PART

Lens colour:	Red
Lens material:	Plastic
Lens illumination:	Illuminated
Lens shape:	Mushroom-head
Lens optics:	opaque

ELECTRICAL CHARACTERISTICS

Switching rating:	
--------------------------	--

MECHANICAL CHARACTERISTIC

Switching action:	Maintained
Release type:	Twist to unlock
Mechanical lifetime:	300 000 cycles of operation

Operating frequency: Max. 600/h

Weight: 0.105 kg

AMBIENT CONDITION

Operating temperature: – 25 °C ... + 70 °C

Storage temperature: – 40 °C ... + 80 °C

Shock resistance: According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

Vibration resistance: According to IEC 60068-2-6: 2 ... 500 Hz: 5 g

Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Actuator, Ø 60 mm, Mushroom-head, Illuminated, Red, Plastic, opaque, Round, Silver, Metal, Maintained, Twist to unlock

Dimension: Ø 60 mm


Housing colour: Silver

Housing material: Metal


Product attributes: Twist to unlock clockwise

Hints: Application as per DIN EN ISO 13850 and EN 60204-1

Wiring diagrams:

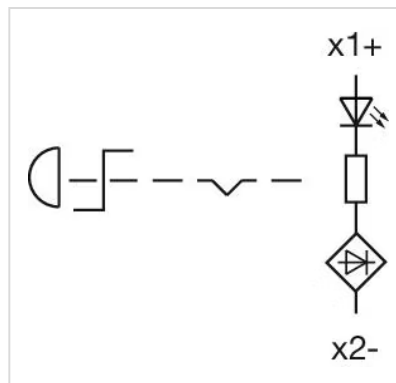

Mounting cut-outs:

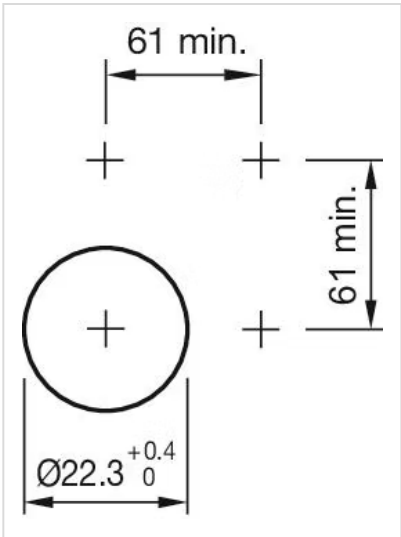

Dimension drawings:

