

# Actuator

45-  
2T07.10G0.000

Distribution by  
Farnell



<https://farnell.eao.com/component/45-2T07.10G...>

Your product:

---



45-2T07.10G0.000

Actuator

*Loading ...*

#### FRONT

<b>Front dimension:</b>	Ø 29,5 mm
<b>Front form:</b>	Round
<b>Front bezel colour:</b>	Black
<b>Front bezel material:</b>	Plastic

#### MOUNTING

<b>Design:</b>	Raised
<b>Mounting cut-out:</b>	Ø 22.3 mm
<b>Mounting type:</b>	Panel mounting

#### OPERATING-/INDICATION PART

<b>Lens colour:</b>	Yellow
<b>Lens material:</b>	Plastic
<b>Lens shape:</b>	Flush
<b>Lens optics:</b>	transparent
<b>Lens type:</b>	Level with front bezel
<b>Lens cap colour:</b>	Yellow
<b>Illumination colour:</b>	Yellow

#### MECHANICAL CHARACTERISTICS

<b>Weight:</b>	0.018 kg
----------------	----------

## AMBIENT CONDITION


<b>IP front protection:</b>	IP66, IP67, IP69K
<b>Operating temperature:</b>	- 25 °C ... + 70 °C
<b>Storage temperature:</b>	- 40 °C ... + 80 °C
<b>Shock resistance:</b>	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
<b>Vibration resistance:</b>	According to IEC 60068-2-6: 2 ... 500 Hz: 5 g
<b>Climate resistance:</b>	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

## CERTIFICATE

<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

## OTHER

<b>Short Description:</b>	Actuator, Ø 22.3 mm, Ø 29,5 mm, Flush, Yellow, Plastic, transparent, Round, Black, Plastic, IP66, IP67, IP69K, Yellow
<b>Housing material:</b>	Plastic
<b>Wiring diagrams:</b>	

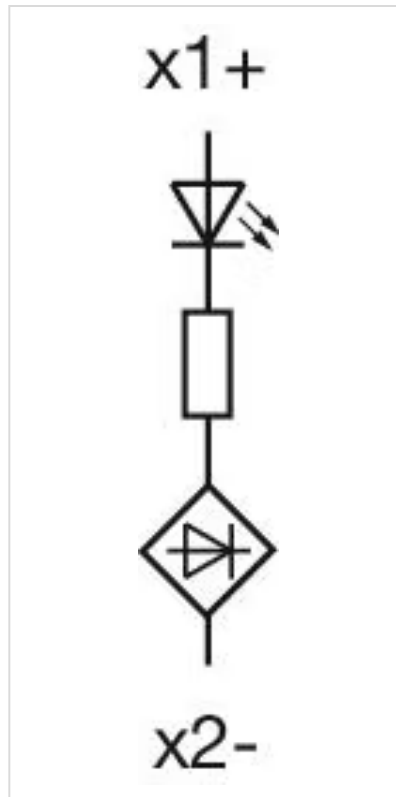

**Mounting cut-outs:**



Dimension drawings:

