


Your Expert Partner for Human Machine Interfaces

Illumination element

Distribution by Farnell



45-320.1G12

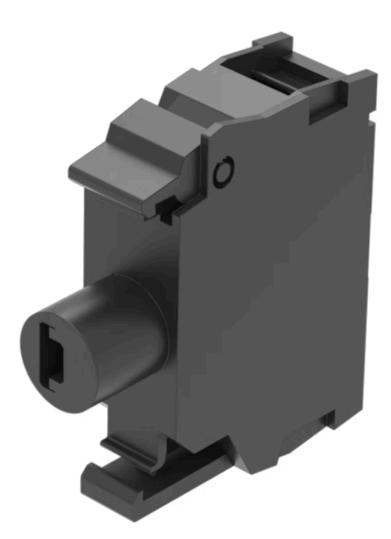



https://farnell.eao.com/component/45-320.1G12...

Your product:



45-320.1G12 Illumination element

MOUNTING		
Component mounting type:	Front mounting	
OPERATING-/INDICATION PART		
Illumination colour:	Yellow	
ELECTRICAL CHARACTERISTICS		
Operating voltage:	24 - 240 V AC/DC	
Surge voltage resistance:	4 kV	
Lumi. Intensity:	900 - 1400 mcd	

MECHANICAL CHARACTERISTICS

Terminal:	Screw terminal
Terminal details 1:	Solid 2 x (1.0 1.5mm²) - With end sleeves 2 x (0.5 0.75 mm²)
Terminal details 2:	Finely stranded - Without end sleeves 2 x (0.5 0.75 mm ²) - Without end sleeves 2 x (0.5 1.5 mm ²) - For AWG cables for auxiliary contacts 2 x (18 14)
Weight:	0.011 kg

CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

Short Description:

Wiring diagrams:

Illumination element, Screw terminal, Yellow, 24 - 240 V AC/DC, Front mounting

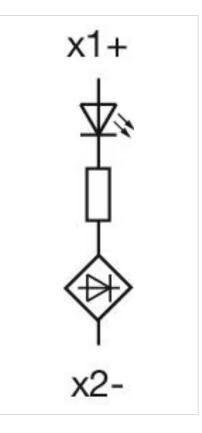

Dimension drawings:

