

# Illumination element

Distribution by Farnell



45-320.1J46







# 45-320.1J46 Illumination element

M	0	Ш	M.	ш	N	Ġ

Component mounting type: Front mounting

#### **OPERATING-/INDICATION PART**

Illumination colour: Blue

#### **ELECTRICAL CHARACTERISTICS**

**Operating voltage:** 24 V AC/DC

Surge voltage resistance: 4 kV

Lumi. Intensity: 280 - 710 mcd

#### **MECHANICAL CHARACTERISTICS**

**Terminal:** Spring-type terminal

Terminal details 1: Solid 2 x  $(0.25 \dots 1.5 \text{mm}^2)$ 

Finely stranded

- Without end sleeves 2 x (0.5  $\dots$  1.5 mm<sup>2</sup>) - With end sleeves 2 x (0.5  $\dots$  0.75 mm<sup>2</sup>)

- For AWG cables for auxiliary contacts 2 x (24 ... 16)

Weight: 0.01 kg


#### **CERTIFICATE**

**REACH:** REACH compliant

RoHS: RoHS compliant

**OTHER** 

## Wiring diagrams:

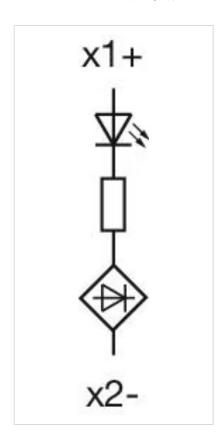

### Dimension drawings:

