


# Illumination element

45-320.1N48

Distribution by  
Farnell

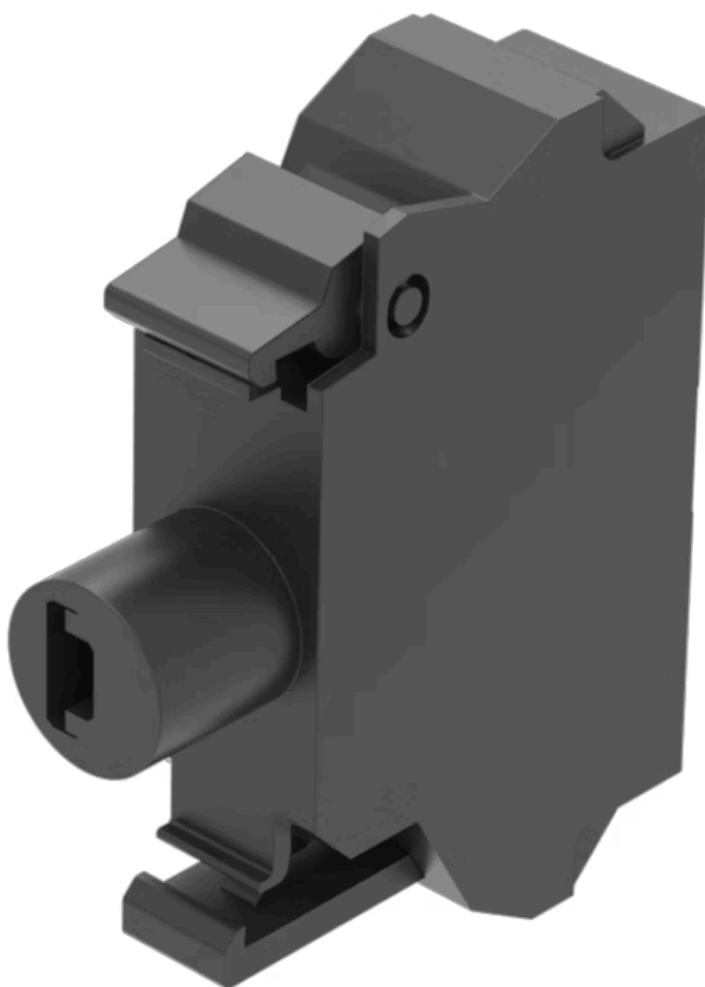

<https://farnell.eao.com/p/45-320.1N48>

Your product:

---



## 45-320.1N48

### Illumination element

#### PRODUCT RANGE

**Product Status:** Phase-out

#### MOUNTING

**Component mounting type:** Front mounting

#### OPERATING-/INDICATION PART

**Illumination colour:** White

#### ELECTRICAL CHARACTERISTICS

**Operating voltage:** 230 V AC

**Surge voltage resistance:** 4 kV

**Lumi. Intensity:** 900 - 1400 mcd

#### MECHANICAL CHARACTERISTIC

**Terminal:** Spring-type terminal

**Terminal details 1:**  
Solid 2 x (0.25 ... 1.5mm<sup>2</sup>)  
Finely stranded  
– Without end sleeves 2 x (0.5 ... 1.5 mm<sup>2</sup>)  
– With end sleeves 2 x (0.5 ... 0.75 mm<sup>2</sup>)  
– For AWG cables for auxiliary contacts 2 x (24 ... 16)

**Weight:** 0.01 kg

#### CERTIFICATE

**REACH:** REACH compliant

**RoHS:**


RoHS compliant

**OTHER**

**Short Description:**

Illumination element, Spring-type terminal, White, 230 V AC, Front mounting

**Wiring diagrams:**

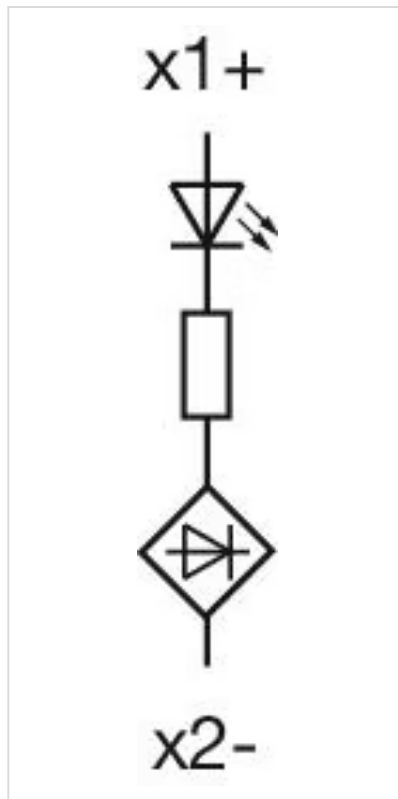

**Dimension drawings:**

