

# Illumination element

45-320.2E11

Distribution by  
Farnell



<https://farnell.eao.com/component/45-320.2E11...>

Your product:

---



## 45-320.2E11

### Illumination element

*Loading ...*

#### MOUNTING

**Component mounting type:** Base mounting

#### OPERATING-/INDICATION PART

**Illumination colour:** Red

#### ELECTRICAL CHARACTERISTICS

**Operating voltage:** 6 - 24 V AC/DC

**Surge voltage resistance:** 4 kV

**Lumi. Intensity:** 450 - 1120 mcd

#### MECHANICAL CHARACTERISTICS

**Terminal:** Screw terminal

**Terminal details 1:** Solid 2 x (1.0 ... 1.5mm<sup>2</sup>)  
– With end sleeves 2 x (0.5 ... 0.75 mm<sup>2</sup>)

**Terminal details 2:** Finely stranded  
– Without end sleeves 2 x (0.5 ... 0.75 mm<sup>2</sup>)  
– Without end sleeves 2 x (0.5 ... 1.5 mm<sup>2</sup>)  
– For AWG cables for auxiliary contacts 2 x (18 ... 14)

**Weight:** 0.02 kg

#### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

## OTHER


### Short Description:

Illumination element, Screw terminal, Red, 6 - 24 V AC/DC, Base mounting

### Hints:

Illumination element base mounting can used only with enclosure

### Wiring diagrams:

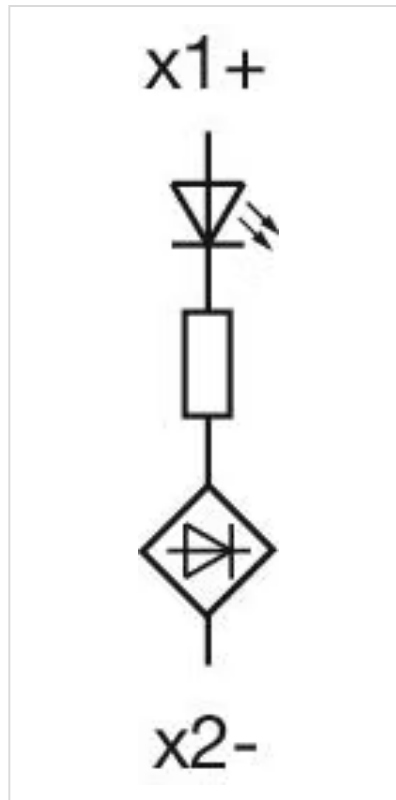

### Dimension drawings:

