

# Actuator

46-  
2818.1CZ0.007

Distribution by  
Farnell



<https://farnell.eao.com/component/46-2818.1CZ...>

Your product:

---



## 46-2818.1CZ0.007 Actuator

*Loading ...*

### FRONT

<b>Front dimension:</b>	Ø 29 mm
<b>Front form:</b>	Round
<b>Front bezel colour:</b>	Black
<b>Front bezel material:</b>	Plastic

### MOUNTING

<b>Design:</b>	Raised
<b>Mounting cut-out:</b>	Ø 22.3 mm
<b>Mounting type:</b>	Panel mounting

### OPERATING-/INDICATION PART

<b>Lever colour:</b>	Black
<b>Lever bar colour:</b>	Yellow
<b>Lever material:</b>	plastic
<b>Lever shape:</b>	short

### ELECTRICAL CHARACTERISTICS

<b>Protection class:</b>	II
--------------------------	----

### MECHANICAL CHARACTERISTICS

<b>Switching action:</b>	Maintained - Maintained - Maintained - Maintained
<b>Switching positions:</b>	4 positions

**Switching angle:** 52°  
**Mechanical lifetime:** 1 Mil. cycles of operation  
**Tightening torque:** 2 ... 3 Nm (17.7 ... 26.6 Lb-in)  
**Weight:** 0.027 kg

### AMBIENT CONDITION


**IP front protection:** IP65  
**IK front protection:** IK06  
**Operating temperature:** - 25 °C ... + 55 °C  
**Shock resistance:** 30g, 18ms (EN-IEC 60068-2-27)  
50g, 11ms (EN-IEC 60068-2-27)  
**Vibration resistance:** 5g f= 2...500Hz (EN-IEC 60068-2-6)  
**Climate resistance:** +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)

### CERTIFICATE


**Approbations:** CSA, EAC, UL  
**Conformities:** CE  
**REACH:** REACH compliant  
**RoHS:** RoHS compliant  
**Standards:** CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508

### OTHER

**Short Description:** Actuator, Ø 22.3 mm, Ø 29 mm, non illuminative, Black, short, Round, Black, Plastic, Maintained - Maintained - Maintained - Maintained, IP65, IK06  
**Housing colour:** Black  
**Housing material:** Plastic  
**max. number of switching elements:** 8  
**Switching positions:**

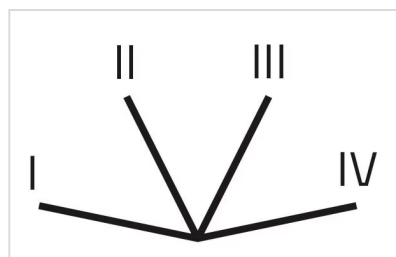

**Mounting cut-outs:**

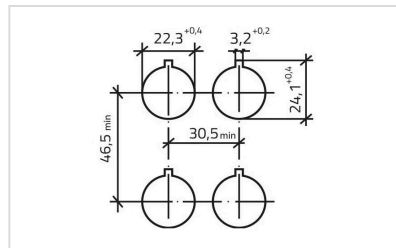

**Dimension drawings:**

