

Actuator

46-
2819.1CV0.008

Distribution by
Farnell



<https://farnell.eao.com/component/46-2819.1CV...>

Your product:



46-2819.1CV0.008 Actuator

Loading . . .

FRONT

| | |
|------------------------------|---------|
| Front dimension: | Ø 29 mm |
| Front form: | Round |
| Front bezel colour: | Black |
| Front bezel material: | Plastic |

MOUNTING

| | |
|--------------------------|----------------|
| Design: | Raised |
| Mounting cut-out: | Ø 22.3 mm |
| Mounting type: | Panel mounting |

OPERATING-/INDICATION PART

| | |
|--------------------------|---------|
| Lever colour: | Black |
| Lever bar colour: | White |
| Lever material: | plastic |
| Lever shape: | short |

ELECTRICAL CHARACTERISTICS

| | |
|--------------------------|----|
| Protection class: | II |
|--------------------------|----|

MECHANICAL CHARACTERISTICS

| | |
|-----------------------------|--------------------------------|
| Switching action: | Maintained - Rest - Maintained |
| Switching positions: | 3 positions |

Switching angle: 60° left / 60° right
Mechanical lifetime: 1 Mil. cycles of operation
Tightening torque: 2 ... 3 Nm (17.7 ... 26.6 Lb-in)
Weight: 0.027 kg

AMBIENT CONDITION


IP front protection: IP65
IK front protection: IK06
Operating temperature: - 25 °C ... + 55 °C
Shock resistance: 30g, 18ms (EN-IEC 60068-2-27)
50g, 11ms (EN-IEC 60068-2-27)
Vibration resistance: 5g f= 2...500Hz (EN-IEC 60068-2-6)
Climate resistance: +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)

CERTIFICATE


Approbations: CSA, EAC, UL
Conformities: CE
REACH: REACH compliant
RoHS: RoHS compliant
Standards: CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508

OTHER

Short Description: Actuator, Ø 22.3 mm, Ø 29 mm, non illuminative, Black, short, Round, Black, Plastic, Maintained - Rest - Maintained, IP65, IK06
Housing colour: Black
Housing material: Plastic
max. number of switching elements: 8
Switching positions:

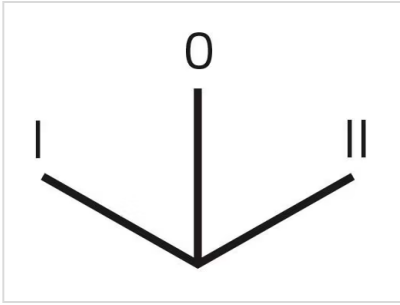

Mounting cut-outs:

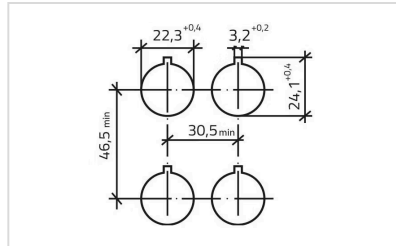

Dimension drawings:

