

# Actuator

61-0009.0

Distribution by  
Farnell



<https://farnell.eao.com/component/61-0009.0/e...>

Your product:

---



## 61-0009.0 Actuator

*Loading ...*

### **MOUNTING**

**Mounting type:** Panel mounting

### **MECHANICAL CHARACTERISTICS**

**Tightening torque:** Max. 0.5 Nm

**Weight:** 0.003 kg

### **AMBIENT CONDITION**

**IP Protection:** IP40 rear side, according to EN IEC 60529, IP67 front side, according to EN IEC 60529

**Operating temperature:** – 25 °C ... + 55 °C

**Storage temperature:** – 40 °C ... + 85 °C

### **CERTIFICATE**

**REACH:** REACH compliant


**RoHS:** RoHS compliant

### **OTHER**


**Short Description:** Actuator

**Housing material:** Plastic, according to UL 94 V0, self-extinguishing

**Wiring diagrams:**

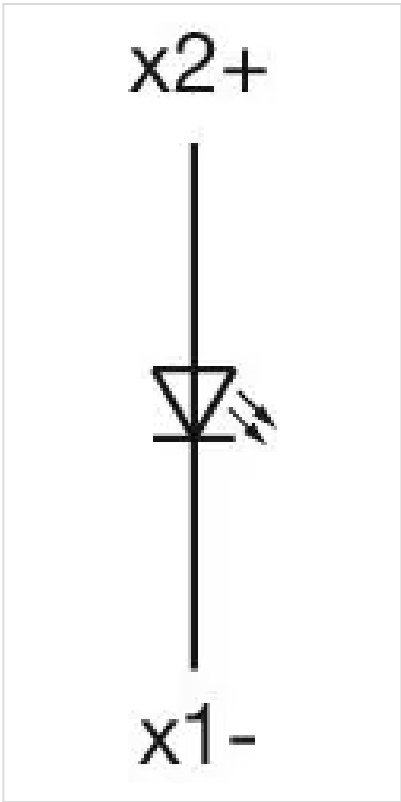


**Mounting cut-outs:**

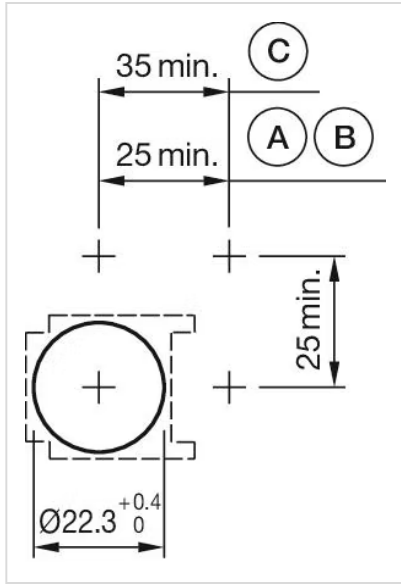


- A = Solder/Plug-in terminal 2.8 mm x 0.5 mm
- B = Solder terminal
- C = Screw terminal

**Dimension drawings:**

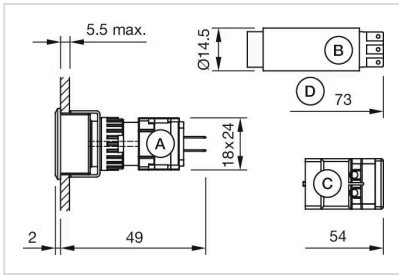

A = Plug-in terminal 2.8 mm x 0.5 mm  
 B = Solder terminal  
 C = Screw terminal  
 D = Flasher

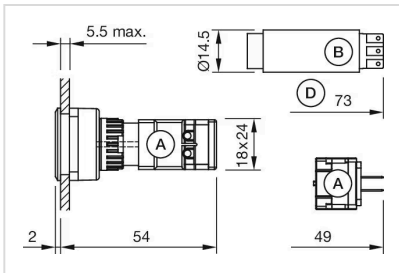

A = Plug-in terminal 2.8 mm x 0.5 mm  
 B = Solder terminal  
 C = Screw terminal  
 D = Flasher