


Switching element

70-220.4S

Distribution by
Farnell

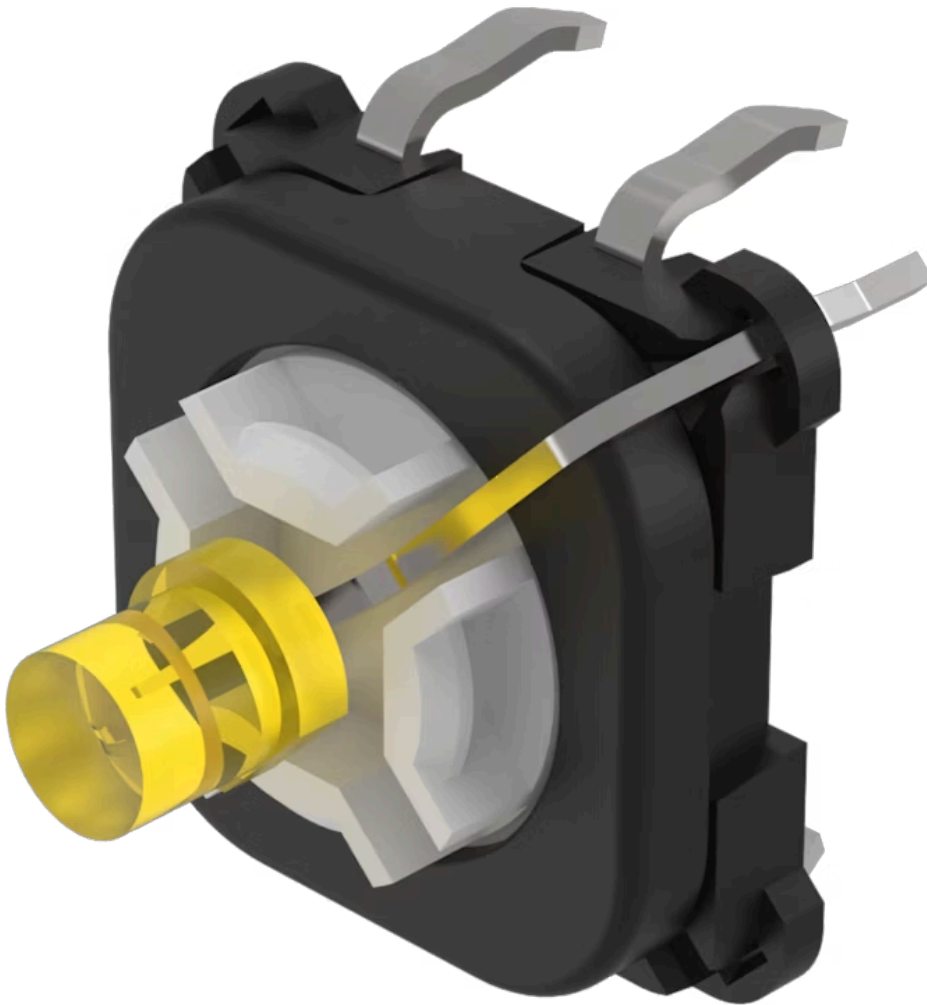

<https://farnell.eao.com/component/70-220.4S/e...>

Your product:



70-220.4S

Switching element

Loading . . .

OPERATING-/INDICATION PART

Illumination colour: Yellow

ELECTRICAL CHARACTERISTICS

Contacts: 1 NO

Forward voltage: 2.9 V DC @ 20 mA

Switching rating: 42 V DC @ 0,1 A

Lumi. Intensity: 600 mcd

MECHANICAL CHARACTERISTICS

Terminal: PCB terminal

Contact material: Gold

Switching action: Momentary

Switching system: Short-travel element

Weight: 0.001 kg

CERTIFICATE

REACH: REACH compliant


RoHS: RoHS compliant

OTHER


Short Description: Switching element, Short-travel element, 42 V DC @ 0,1 A, Gold, 1 NO, PCB terminal

Hints: The customer has to decide what series resistor shall be used to the LED

Wiring diagrams:

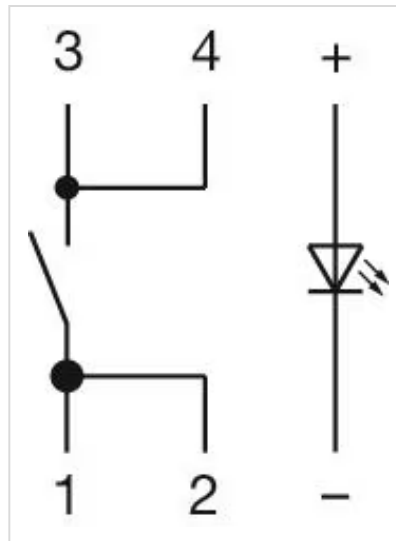

Component layouts:

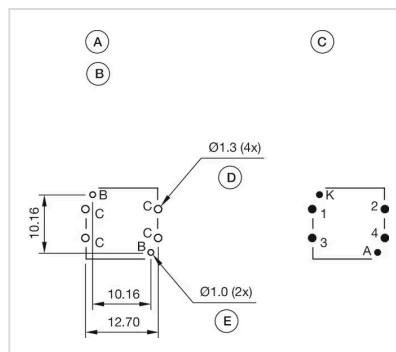

A = Switching element with illumination
B = Single LED
C = Drilling plan (component side)
D = Hole for switching element, pad max. Ø 2.5 mm
E = Hole for LED

Dimension drawings:

