


Switching element

Distribution by Farnell Farnell

70-220.6S



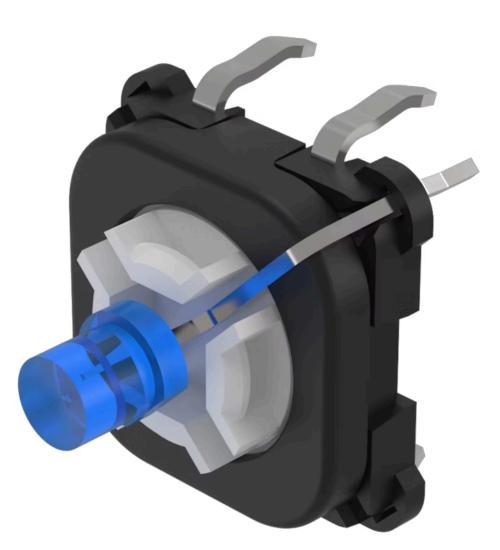

https://farnell.eao.com/p/70-220.6S

Your product:



70-220.6S Switching element

OPERATING-/INDICATION PART	
Illumination colour:	Blue
ELECTRICAL CHARACTERISTICS	
Contacts:	1 NO
Switching rating:	42 V DC @ 0,1 A
Lumi. Intensity:	250 mcd
MECHANICAL CHARACTERISTICS	
Terminal:	PCB terminal
Contact material:	Gold


	Golu
Switching action:	Momentary
Switching system:	Short-travel element
Weight:	0.001 kg

CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

Short Description:	Switching element, Short-travel element, 42 V DC @ 0,1 A, Gold, 1 NO, PCB terminal
Hints:	The customer has to decide what series resistor shall be used to the LED
Wiring diagrams:	



Component layouts:



A = Switching element with illumination B = Single LED

- C = Drilling plan (component side)
 D = Hole for switching element, pad max.
 Ø 2.5 mm
- E = Hole for LED

Dimension drawings:

