

Actuator

704.006.718











704.006.718 Actuator

FR		

Front dimension: Ø 35 mm

Front form: Round

Front bezel colour: Nature

Front bezel material: Aluminium

MOUNTING

Design: Flush

Mounting cut-out: Ø 30.5 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens colour: Colourless

Lens material: Plastic

Lens shape: Flush

Lens optics: transparent

Marking plate illumination: illuminative

ELECTRICAL CHARACTERISTICS

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN

EN 60947-1

MECHANICAL CHARACTERISTICS

Terminal: Screw terminal

Weight:	0.061 kg

AMBIENT CONDITION

IP Protection: IP65 front side

Operating temperature: $-40 \, ^{\circ}\text{C} \, ... + 55 \, ^{\circ}\text{C}$

Storage temperature: $-40 \, ^{\circ}\text{C} \dots + 85 \, ^{\circ}\text{C}$

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Actuator, Ø 30.5 mm, Ø 35 mm, Flush, Colourless, Plastic, transparent, Round,

Nature, Aluminium, anodised, Screw terminal


Housing colour: Grey

Housing material: Plastic


Hints: The colour of anodised aluminium parts can vary due to technical production

reasons

Wiring diagrams:

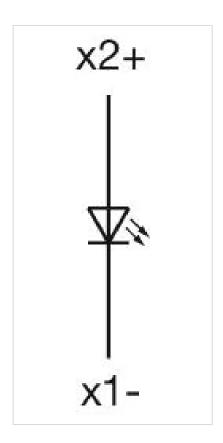



Mounting cut-outs:



A = Screw terminal

Dimension drawings:





A = Screw terminal