


Actuator

704.116.0





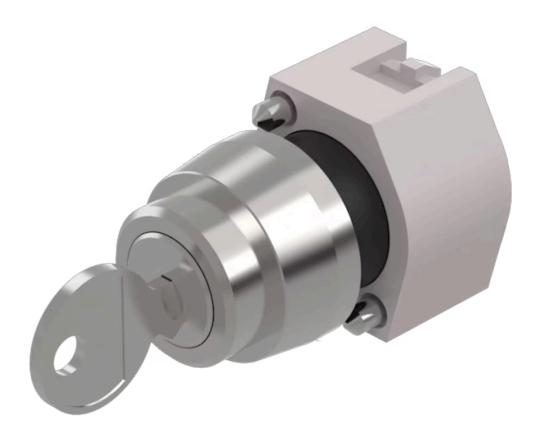



Your product:



704.116.0 Actuator

Е	D	0	N	п
г	п	v	14	

Front dimension: Ø 29 mm

Front form: Round

Front bezel colour: Nature

Front bezel material: Aluminium

MOUNTING

Design: Raised

Mounting type: Panel mounting

ELECTRICAL CHARACTERISTICS

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN

EN 60947-1

MECHANICAL CHARACTERISTICS

Switching action: Maintained (a) - Rest - Maintained (a)

Switching positions: 3 positions

Switching angle: 42° left / 42° right

Mechanical lifetime: ≤50 000 cycles of operation

Weight: 0.071 kg

AMBIENT CONDITION

IP Protection: IP65 front side

Operating temperature: $-40 \, ^{\circ}\text{C} \, ... + 55 \, ^{\circ}\text{C}$

Storage temperature:	− 40 °C + 85 °C
otorago tomporataror	10 0 1 00 0

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Actuator, Ø 29 mm, Round, Nature, Aluminium, Maintained (a) - Rest - Maintained

(a)

Hints: The standard lock Ronis 251

Further lock numbers on request


Max. 3 switching elements can be clipped on

max. number of switching

elements:


3

Switching positions:

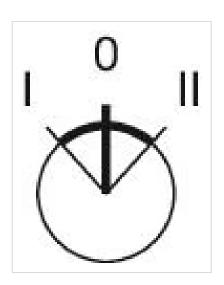

Wiring diagrams:


Mounting cut-outs:



A = Screw terminal

B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8

Dimension drawings:



A = Screw terminal