


# Actuator

704.123.018





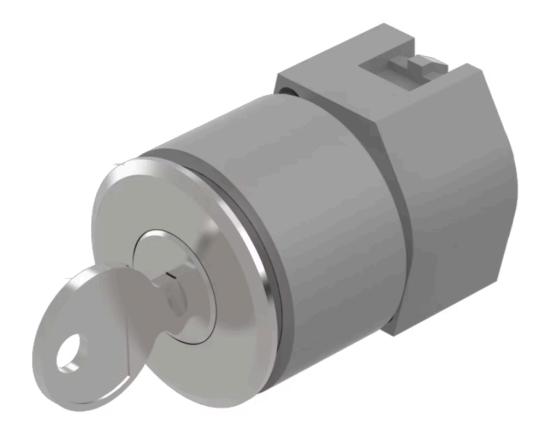





## 704.123.018 Actuator

	_	_		-
ь.	к	()	N	

Front dimension: Ø 35 mm

Front form: Round

Front bezel colour: Nature

Front bezel material: Aluminium

#### **MOUNTING**

Design: Flush

**Mounting cut-out:** Ø 30.5 mm

Mounting type: Panel mounting

#### **ELECTRICAL CHARACTERISTICS**

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN

EN 60947-1

#### **MECHANICAL CHARACTERISTICS**

Switching action: Rest (a) - Momentary

**Switching positions:** 2 positions

Switching angle: 42° right

**Mechanical lifetime:** ≤50 000 cycles of operation

**Weight:** 0.101 kg

#### **AMBIENT CONDITION**

**IP Protection:** IP65 front side

Operating temperature:	– 40 °C + 55 °C
Storage temperature:	− 40 °C + 85 °C

**CERTIFICATE** 

**REACH:** REACH compliant

RoHS: RoHS compliant

**OTHER** 

Short Description: Actuator, Ø 30.5 mm, Ø 35 mm, Round, Nature, Aluminium, Rest (a) - Momentary

Hints: The standard lock Ronis 251

Further lock numbers on request


Max. 3 switching elements can be clipped on

max. number of switching

elements:

3


Switching positions:

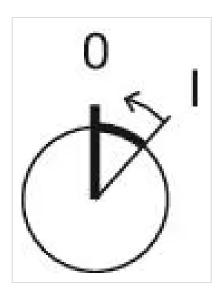

Wiring diagrams:




Mounting cut-outs:



A = Screw terminal

B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8

### **Dimension drawings:**



A = Screw terminal