

Your Expert Partner for Human Machine Interfaces

# Actuator

704.202.4







https://farnell.eao.com/p/704.202.4

# Your product:



# 704.202.4 Actuator

### FRONT

Front dimension:	30 mm x 30 mm
Front form:	Square
Front bezel colour:	Grey
Front bezel material:	Plastic

#### MOUNTING

Design:	Raised
Mounting type:	Panel mounting

#### **OPERATING-/INDICATION PART**

Lens colour:	Yellow
Lens material:	Plastic
Lens shape:	Flush
Lens optics:	transparent
Marking plate colour:	White
Marking plate optics:	translucent
Marking plate illumination:	illuminative

#### **ELECTRICAL CHARACTERISTICS**

Standards:

The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1

Terminal:	Screw terminal
Weight:	0.05 kg

#### **AMBIENT CONDITION**


IP Protection:	IP65 front side
Operating temperature:	– 40 °C + 55 °C
Storage temperature:	– 40 °C + 85 °C

# CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

### OTHER


Short Description:	Actuator, 30 mm x 30 mm, Flush, Yellow, Plastic, transparent, Square, Grey, Plastic, Screw terminal
Housing colour:	Black
Housing material:	Plastic
Hints:	Filament lamp or LED
Wiring diagrams:	

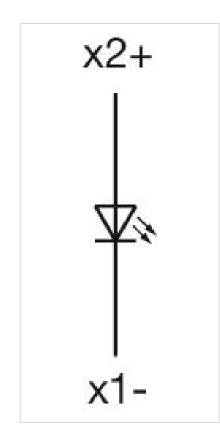

# Mounting cut-outs:

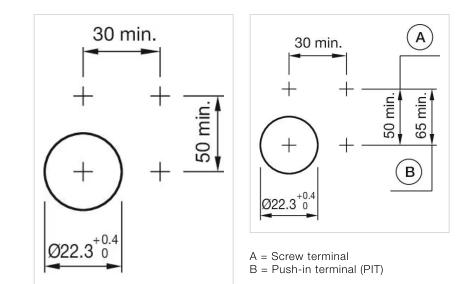

# Dimension drawings:



A = Screw terminal

