

Actuator

704.206.7











704.206.7 Actuator

	_	_		-
ь.	к	()	N	

Front dimension: 30 mm x 30 mm

Front form: Square

Front bezel colour: Black

Front bezel material: Plastic

MOUNTING

Design: Raised

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens colour: Colourless

Lens material: Plastic

Lens shape: Flush

Lens optics: transparent

Marking plate colour: White

Marking plate optics: translucent


Marking plate illumination: illuminative

ELECTRICAL CHARACTERISTICS


Standards: The switches comply with the "Standards for low-voltage switching devices" DIN


EN 60947-1

Terminal:	Screw terminal	
Weight:	0.05 kg	
AMBIENT CONDITION		
IP Protection:	IP65 front side	
Operating temperature:	– 40 °C + 55 °C	
Storage temperature:	– 40 °C + 85 °C	
CERTIFICATE		
REACH:	REACH compliant	
RoHS:	RoHS compliant	
OTHER		
Short Description:	Actuator, 30 mm x 30 mm, Flush, Colourless, Plastic, transparent, Square, Black, Plastic, Screw terminal	
Housing colour:	Black	
Housing material:	Plastic	
Hints:	Filament lamp or LED	
Wiring diagrams:		

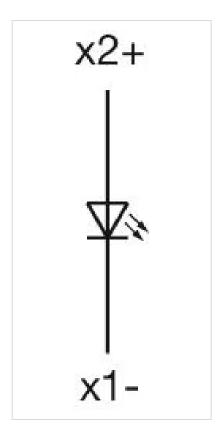


Mounting cut-outs:





A = Screw terminal B = Push-in terminal (PIT)

Dimension drawings:



A = Screw terminal

