


Your Expert Partner for Human Machine Interfaces

Actuator

704.302.000

Distribution by Farnell Farnell

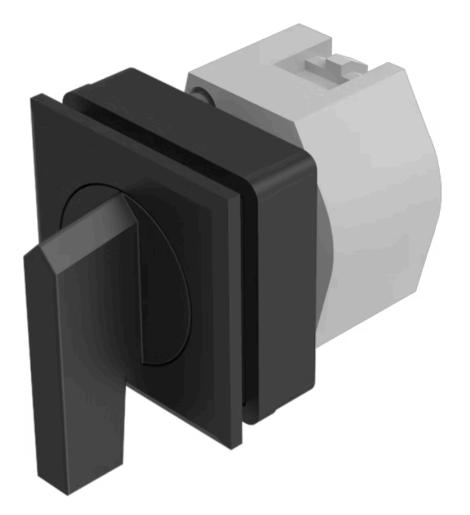



https://farnell.eao.com/p/704.302.000

Your product:



704.302.000 Actuator

FRONT

Front dimension:	35 mm x 35 mm
Front form:	Square
Front bezel colour:	Black
Front bezel material:	Plastic

MOUNTING

Design:	Flush
Mounting cut-out:	30 mm x 30 mm
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lever colour:	Black
Lever bar colour:	Black
Lever material:	plastic
Lever shape:	long

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1

MECHANICAL CHARACTERISTICS

Switching action:

Switching positions:

2 positions

Rest - Momentary

Switching angle:	42° right
Mechanical lifetime:	≤2.5 Mil. cycles of operation
Weight:	0.056 kg

AMBIENT CONDITION

IP Protection:	IP65 front side
Operating temperature:	– 40 °C + 55 °C
Storage temperature:	– 40 °C + 85 °C

CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

Short Description:Actuator, 30 mm x 30 mm, 35 mm x 35 mm, non illuminative, Black, long, Square,
Black, Plastic, Rest - Momentary


Hints:

max. number of switching elements:

Switching positions:

Max. 3 switching elements can be clipped on


З

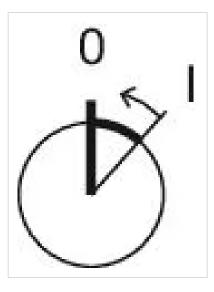

Wiring diagrams:



Mounting cut-outs:




A = Screw terminal

B = Push-in terminal (PIT) C = Plug-in terminal 6.3 mm x 0.8 mm D = Double plug-in terminal 6.3v x 0.8

mm

Dimension drawings:



A = Screw terminal