


# Lamp element

71-670.006

Distribution by  
Farnell

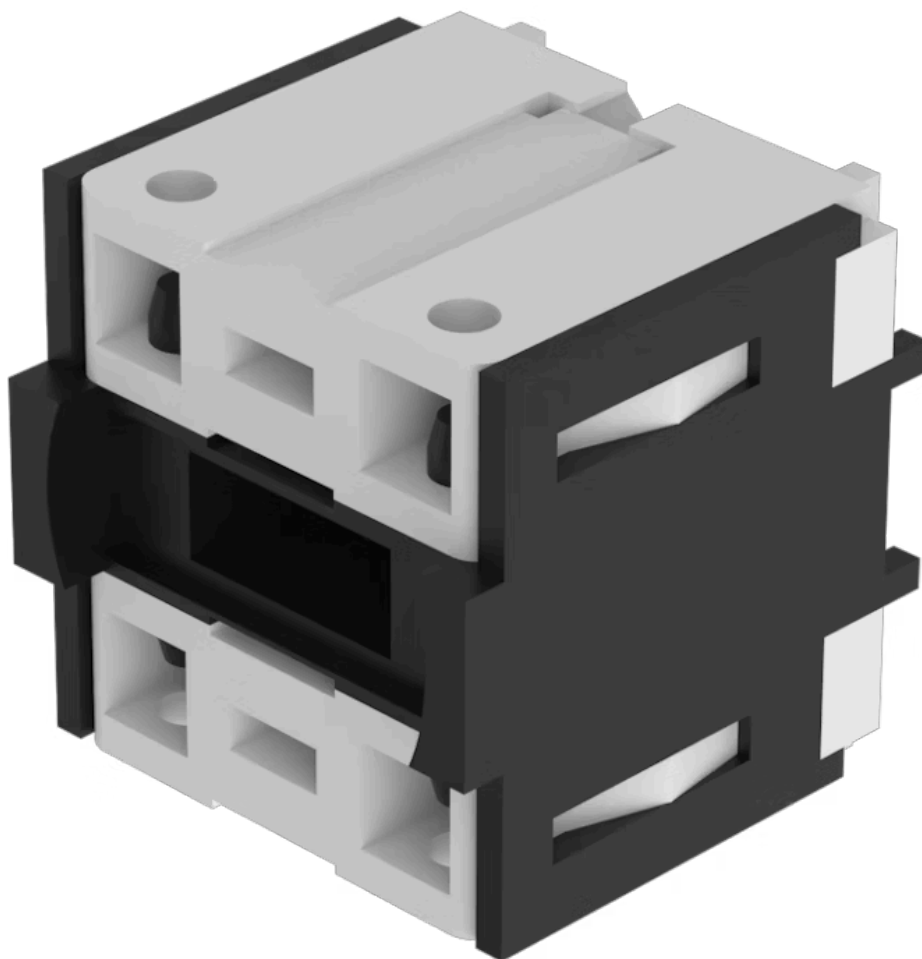

<https://farnell.eao.com/p/71-670.006>

Your product:

---



## 71-670.006

### Lamp element

#### MECHANICAL CHARACTERISTICS

**Terminal:** PCB terminal

**Weight:** 0.005 kg

#### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

#### OTHER


**Short Description:** Lamp element, PCB terminal, Plastic

**Material:** Plastic


**Housing material:** Plastic

**Hints:** Including locking pin

**Wiring diagrams:**

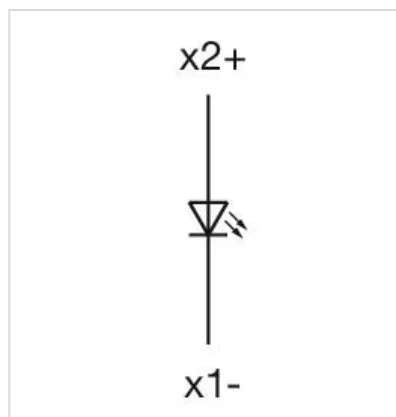

**Component layouts:**

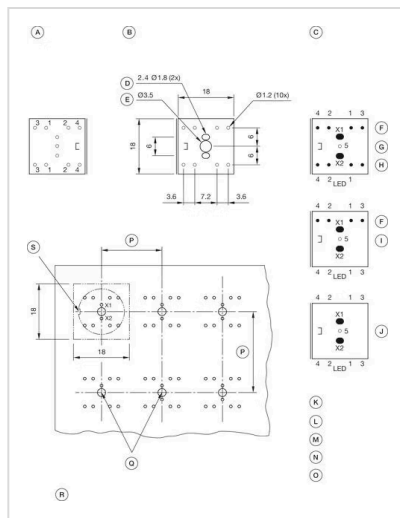

A = Terminals (rear side)

B = Drilling plan (component side)

C = non-metallic

D = Cu-Pad

E = Occupancy plan (component side)

F = 1. Switch

G = Switching element 2 Normally close +  
2 Normally open, Part No. 71-672.026

H = 2. Switches

I = Switching element 1 Normally close +  
1 Normally open, Part No. 71-671.026

J = Illumination element, Part No. 71-670.026

K = X1 Lamp cathode (-)

L = X2 Lamp anode (+)

M = 1-2 Contact normally closed

N = 3-4 Contact normally open

O = 5 Hole for interlocking pin

P = Front dimension min.

Q = Position interlocking pin

R = Note:

Pitch of the print circuit board hole Ø3.5

must agree with the mounting holes on the front plate

S = Slot in actuator