


# Lamp element

Distribution by Farnell



71-670.006

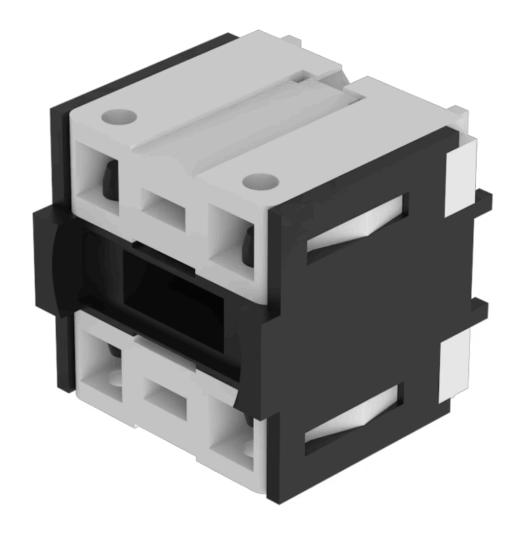





# 71-670.006 Lamp element

## **MECHANICAL CHARACTERISTICS**

**Terminal:** PCB terminal

**Weight:** 0.005 kg

#### **CERTIFICATE**

**REACH:** REACH compliant

**RoHS:** RoHS compliant

### **OTHER**


Short Description: Lamp element, PCB terminal, Plastic

Material: Plastic


Housing material: Plastic

**Hints:** Including locking pin

Wiring diagrams:



Component layouts:

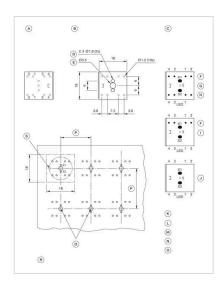

A = Terminals (rear side)

B = Drilling plan (component side)

C = non-metallic

D = Cu-Pad

E = Occupancy plan (component side)

F = 1. Switch

G = Switching element 2 Normaly close +

2 Normaly open, Part No. 71-672.026

H = 2. Switches

I = Switching element 1 Normaly close +

1 Normaly open, Part No. 71-671.026

J = Illumination element, Part No. 71-670.026

K = X1 Lamp cathode (-)

L = X2 Lamp anode (+)

M = 1-2 Contact normally closed

N = 3-4 Contact normally open

O = 5 Hole for interlocking pin

P = Front dimension min.

Q = Position interlocking pin

R = Note:

Pitch of the print circuit board hole Ø3.5

must agree with the mounting holes on the front plate S = Slot in actuator