


Lamp element

71-670.006

Distribution by
Farnell

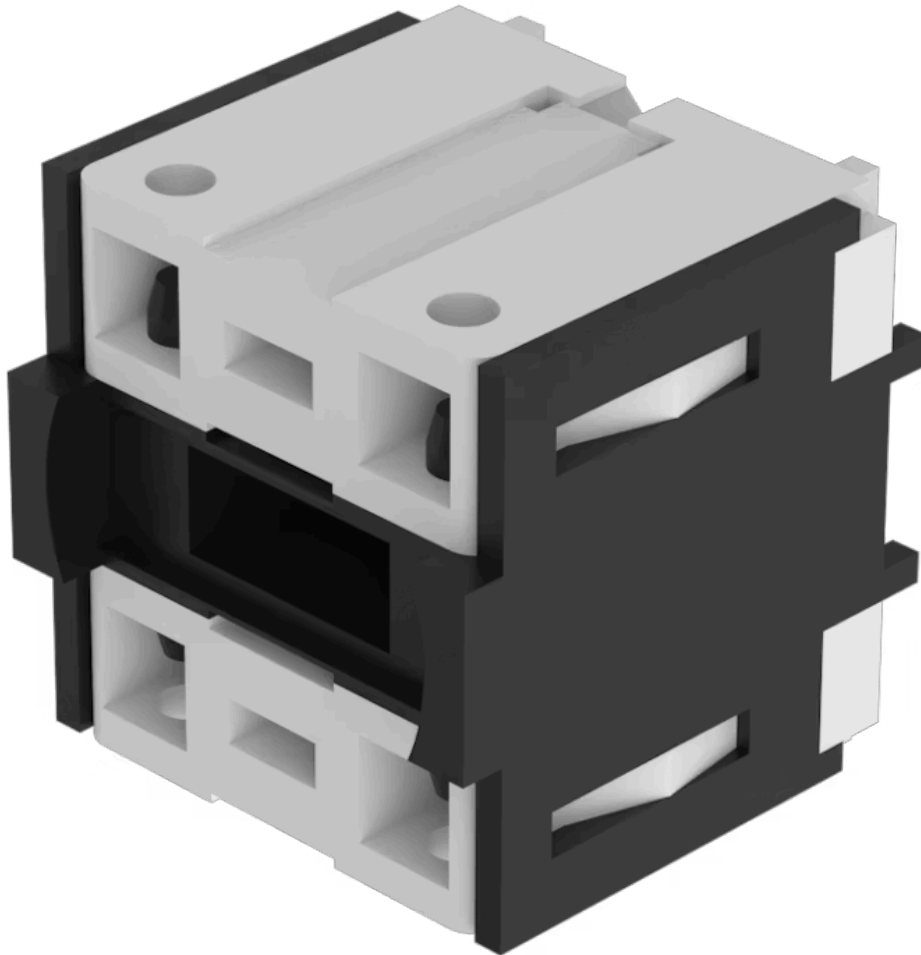

<https://farnell.eao.com/component/71-670.006/...>

Your product:



71-670.006 Lamp element

Loading ...

MECHANICAL CHARACTERISTICS

Terminal: PCB terminal

Weight: 0.005 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER


Short Description: Lamp element, PCB terminal, Plastic

Material: Plastic


Housing material: Plastic

Hints: Including locking pin

Wiring diagrams:

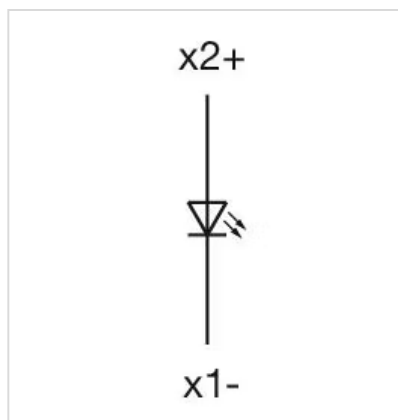

Component layouts:

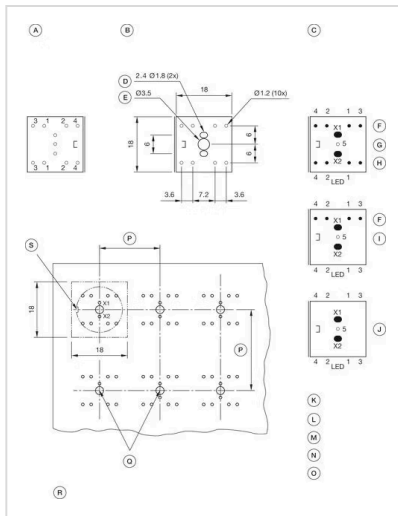

- A = Terminals (rear side)
- B = Drilling plan (component side)
- C = non-metallic
- D = Cu-Pad
- E = Occupancy plan (component side)
- F = 1. Switch
- G = Switching element 2 Normaly close + 2 Normaly open, Part No. 71-672.026
- H = 2. Switches
- I = Switching element 1 Normaly close + 1 Normaly open, Part No. 71-671.026
- J = Illumination element, Part No. 71-670.026
- K = X1 Lamp cathode (-)
- L = X2 Lamp anode (+)
- M = 1-2 Contact normally closed
- N = 3-4 Contact normally open
- O = 5 Hole for interlocking pin
- P = Front dimension min.
- Q = Position interlocking pin
- R = Note:
Pitch of the print circuit board hole $\varnothing 3.5$ must agree with the mounting holes on the front plate
- S = Slot in actuator