

Illumination element

Distribution by Farnell



45-320.2N41







45-320.2N41 Illumination element

	\sim				
W	U	υſ	ТΝ	IN	G

Component mounting type: Base mounting

OPERATING-/INDICATION PART

Illumination colour: White

ELECTRICAL CHARACTERISTICS

Operating voltage: 6 - 24 V AC/DC

Surge voltage resistance: 4 kV

Lumi. Intensity: 900 - 1400 mcd

MECHANICAL CHARACTERISTICS

Terminal: Spring-type terminal

Terminal details 1: Solid 2 x (0.25 ... 1.5mm²)

Finely stranded

- Without end sleeves 2 x (0.5 \dots 1.5 mm²) - With end sleeves 2 x (0.5 \dots 0.75 mm²)

- For AWG cables for auxiliary contacts 2 x (24 ... 16)

Weight: 0.02 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER


Short Description:

Illumination element, Spring-type terminal, White, 6 - 24 V AC/DC, Base mounting

Hints:

Illumination element base mounting can used only with enclosure

Wiring diagrams:

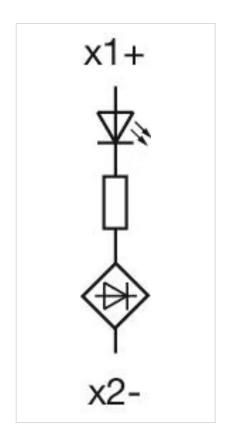

Dimension drawings:

