

Switching element

61-8410.12

Distribution by
Farnell



<https://farnell.eao.com/p/61-8410.12>

Your product:



61-8410.12

Switching element

ELECTRICAL CHARACTERISTICS

Switching voltage and switching current:

Switch rating AC with silver contact or silver contact with gold plating		
Service category AC-15		
according to EN IEC 60947-5-1		
Voltage		125 VAC
Current		2.5 A
Switch rating DC with silver contact or silver contact with gold plating		
Service category DC-13		
according to EN IEC 60947-5-1		
Voltage		250 VDC
Current		0.15 A

Contacts:	1 NO
Rated Operational Voltage Ue:	250 VAC/DC according to EN IEC 60947-1
Rated impulse withstand voltage Uimp:	4 kV, according to EN/IEC 60947-5-1
Rated insulation voltage Ui:	320 VAC, according to EN / IEC 60947-5-1
Recommended minimum operational data:	Voltage 20 VAC/DC
	Current 100 mA
Switching rating:	250 V AC/DC @ 5 A
Electrical lifetime:	≥50 000 cycles of operation at 250VAC, 2A, cosφ 0.95,
Electric strength:	2500 VAC, 50 Hz, 1 minute, as per DIN / IEC 60512-2 between all terminals and earth
Overvoltage category:	III, according to EN / IEC 60947-5-1
Pollution degree:	2, according to EN IEC 60947-1
Protection class:	II, according to EN / IEC 61058-1
Standards:	The switches comply with the “Standards for low-voltage switching devices” EN IEC 61058-1, EN IEC 60947-5-1
Thermal current Ith:	5 A

MECHANICAL CHARACTERISTICS

Terminal:	Plug-in terminal, 2.8 x 0.5 mm
Contact material:	Silver
Switching system:	Snap-action switching element
Switching system:	<p>Self-cleaning, double-break snap-action switching system with contact opening width 2mm x 0.5mm (switch with small contact opening width as per EN IEC 61058-1).</p> <p>The switching elements are optionally equipped with the following switching functions: One to three normally open (NO) or normally closed (NC), or any combination of NO and NC plus connections for T1 3/4 LED or lamp.</p> <p>The number of switching elements cannot exceed three. The switching elements provided for the 3-position switch actuators are equipped with max. 2 NC or 2 NO or any combination. The number of switching elements cannot exceed two.</p>
Switching positions:	2 positions
Wire cross section:	<p>1 wire flexible: 0.5 ... 0.75 mm²</p> <p>1 wire super flexible: 0.5 mm²</p> <p>1 wire rigid: 0.5 ... 1.5 mm²</p> <p>2 wires rigid: 0.75 mm²</p> <p>2 wires flexible: 0.5 mm²</p>
Weight:	0.007 kg

AMBIENT CONDITION

Operating temperature:	– 25 °C ... + 55 °C
Storage temperature:	– 40 °C ... + 85 °C
Shock resistance:	Max. 100 m / s ² , pulse width, 3-axis (sinusoidal EN IEC 60068-2-27)
Vibration resistance:	Max. 100 m / s ² from 10 Hz ... 500 Hz, (sinusoidal EN IEC 60068-2-6)
Climate resistance:	<p>Damp heat, cyclic: 96 hours, + 25 °C/97 %, + 55 °C/93 % relative humidity, as per EN IEC 60068-2-30</p> <p>Damp heat, steady: 56 days, + 40 °C/93 % relative humidity, according to EN IEC 60068-2-78</p> <p>Rapid change of temperature: 100 cycles, – 40 °C ... + 80 °C, as per EN / IEC 60068-2-14</p>

CERTIFICATE

Approbations:	CB (IEC 60947-5-1), CB (IEC 61058-1), CENELEC CCA-NTR (EN 60947-5-1), CQC, CSA, DNV, EAC, ENEC (EN 61058-1), NFF, SEV (EN / IEC 60947-5-1), UL
Conformities:	CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)
REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

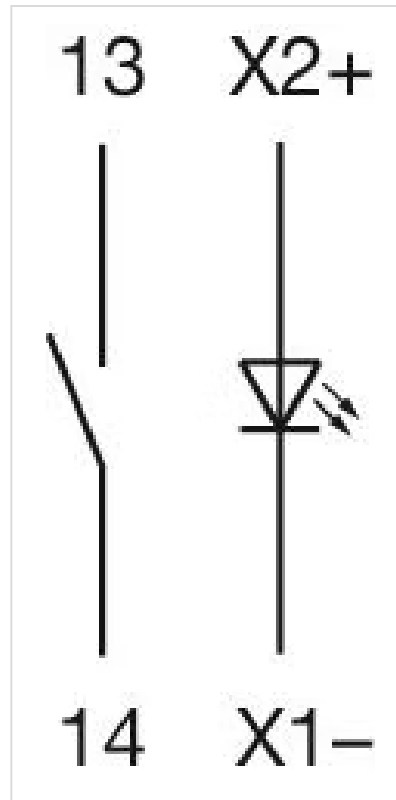
Short Description:	Switching element, Snap-action switching element, 250 V AC/DC @ 5 A, Silver, 1 NO, Plug-in terminal, 2.8 x 0.5 mm
---------------------------	---

Material:

Plastic, according to UL 94 V0

Hints:

With lamp terminal

Wiring diagrams:**Component layouts:**